


Joint Closure System for Unpressurised Copper Telephone Networks

TELECOM OUTSIDE PLANT

- Heat-shrinkable composite joint closure system for environmental and mechanical protection of joints in the unpressurised telephone network: aerial, buried or ducted, non filled or jelly filled, with polyethylene, lead, steel or aluminium sheaths.
- Composite structure of the reinforced Rayfort sleeve offers an excellent resistance to mechanical abuse during and after the installation.
- Integrated moisture barrier completely reconstitutes the cable sheath over the total splice area.
- Hot-melt adhesive forms a watertight seal to the cable sheath.
- A metal canister shapes and mechanically protects the splice bundle.
- Up to 3 cables at each end can be accommodated using three finger clips with hot-melt adhesive.
- Installation indicators: heat sensitive paint and adhesive flow, white line
- Extended size range can accommodate splices up to 3600 pair with any connector type.
- Unlimited shelf life.

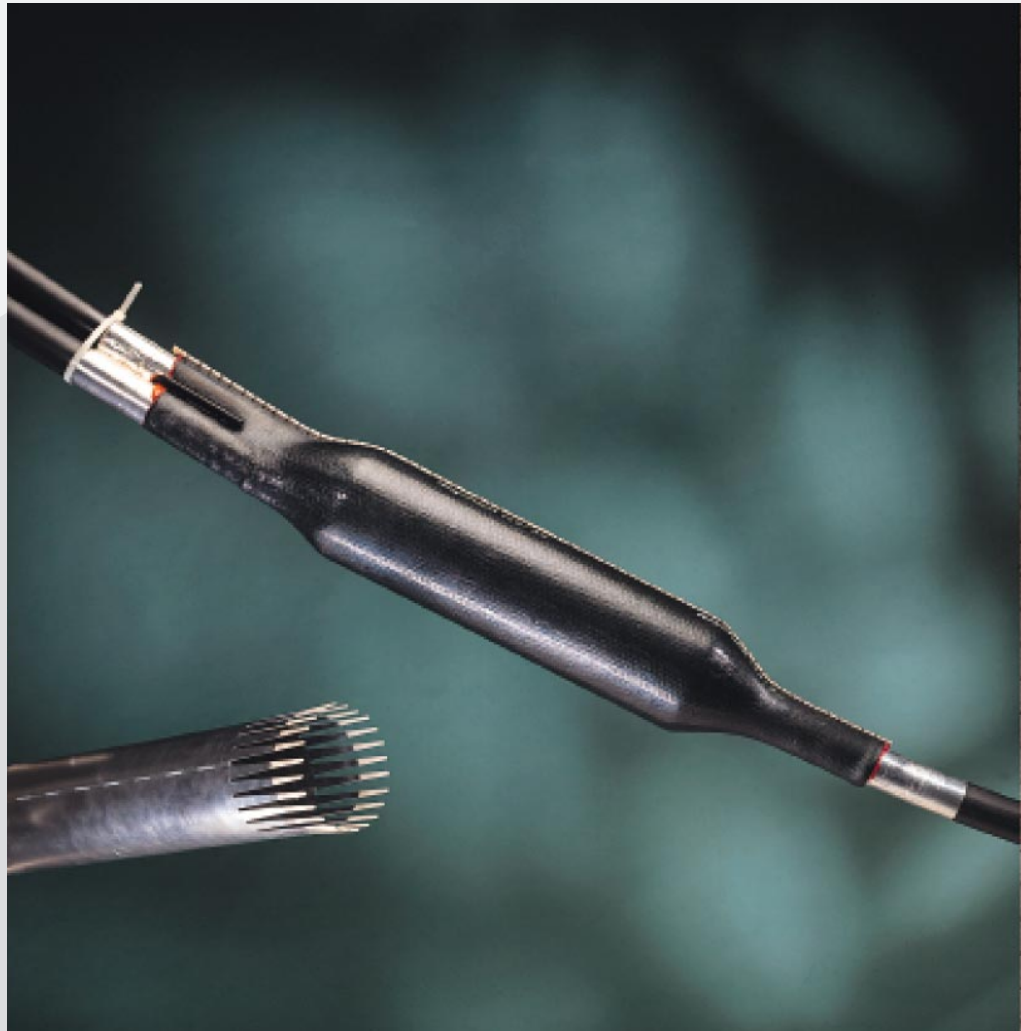


XAGA 550

XAGA 550

XAGA 550 Kit content


- Heat-shrinkable sleeve
- Metal canister (2 metal half shells)
- Self adhering aluminium strip
- Channels with underclip
- Branch-off kit
- Abrasive strip
- Desiccant (silicagel)
- Aluminium foil
- Cleaning tissue
- Shield continuity wire
- Installation procedure

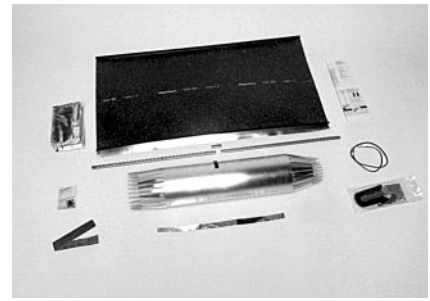

Sizing/ordering information

Selection chart dimensions (mm)


Description	Max. splice bundle diameter (A)	Min. cable diameter (B)	Nominal sheath opening (L)
XAGA 550-43/8-200	43	8	200
XAGA 550-43/8-350	43	8	350
XAGA 550-43/8-500	43	8	500
XAGA 550-75/15-250	75	15	250
XAGA 550-75/15-350	75	15	350
XAGA 550-75/15-500	75	15	500
XAGA 550-75/15-650	75	15	650
XAGA 550-92/25-300	92	25	300
XAGA 550-92/25-500	92	25	500
XAGA 550-92/25-650	92	25	650
XAGA 550-122/30-300	122	30	300
XAGA 550-122/30-500	122	30	500
XAGA 550-122/30-650	122	30	650
XAGA 550-160/42-500	160	42	500
XAGA 550-160/42-650	160	42	650
XAGA 550-160/42-720	160	42	720
XAGA 550-200/50-500	200	50	500
XAGA 550-200/50-650	200	50	650
XAGA 550-200/50-720	200	50	720



* Note for branched joints


The standard XAGA 550 kit will accommodate a maximum of 2 cables branched at one end. Branched joints with more cables require the use of one additional branch-off kit (BOKT-5S or 5M or 5L) per added cable. For joints with 2 or 3 cables in one end the overall diameter must be determined.

Example for three cables

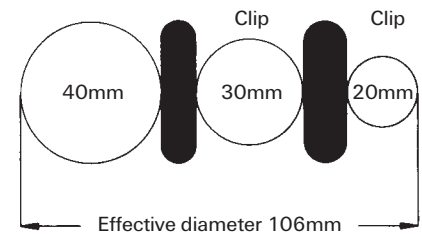

BOKT Kit content

- Branch off clip
- Shield continuity clip + connector
- Cleaning tissue
- Aluminium foil
- Tie wrap

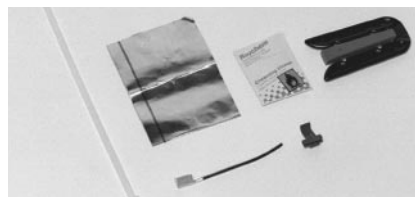

Add 6 mm for every small clip or 8 mm for every medium clip or 10 mm for every large clip. In each case the total diameter must not exceed the max. joint diameter of the kit. Use kit XAGA 550 122/30-xxx.

Sizing/ordering information

Description	BOKT kit
BOKT-5S-43/8-75/15	XAGA 550-43/8-xxx and XAGA 550-75/15-xxx
BOKT-5M-92/25-125/30	XAGA 550-92/25-xxx and XAGA 550-122/30-xxx
BOKT-5L-160/42-200/50	XAGA 550-160/42-xxx and XAGA 550-200/50-xxx

* Note for filled joints (optional)

A special filling compound RSS and filling kit components are available.

Description:
XAGA-550-xx/xx-xxx S

Tyco Electronics Raychem NV

Telecom Outside Plant

Diestsesteenweg 692
3010 Kessel-Lo, Belgium
Tel.: 32-16 351 011
Fax: 32-16 351 697
www.tycoelectronics.com

Tyco and XAGA are trademarks of Tyco International.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, Tyco Electronics makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Tyco Electronics' obligations shall only be as set forth in Tyco Electronics' Standard Terms and Conditions of Sale for this product and in no case will Tyco Electronics be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of Tyco Electronics products should make their own evaluation to determine the suitability of each such product for the specific application.